



Industrial Parquet

Data Sheet

HØRNING Industrial Parquet is a simple, incredibly durable solution.

The flooring has no tongues/grooves, allowing for multiple sandings.

The variations in the many small staves lend the flooring its distinctive 'colour interplay'.

Highlighted Features:

- Exceptional durability for high traffic areas like schools, entrances, and lobbies
- A *Wholehearted* pledge to use the remains of the log, reducing waste in the production
- Documented sustainability credentials towards certifications such as BREEAM, DGNB, and LEED through EPDs and Eurofins

If you have any questions or need advice, please don't hesitate to contact us.

Hørrning Parket A/S


Christiansmindevej 12
DK-8660 Skanderborg

T: +45 7027 6600
W: horningfloor.com
E: sales@horningfloor.dk



Industrial Parquet

Data Sheet

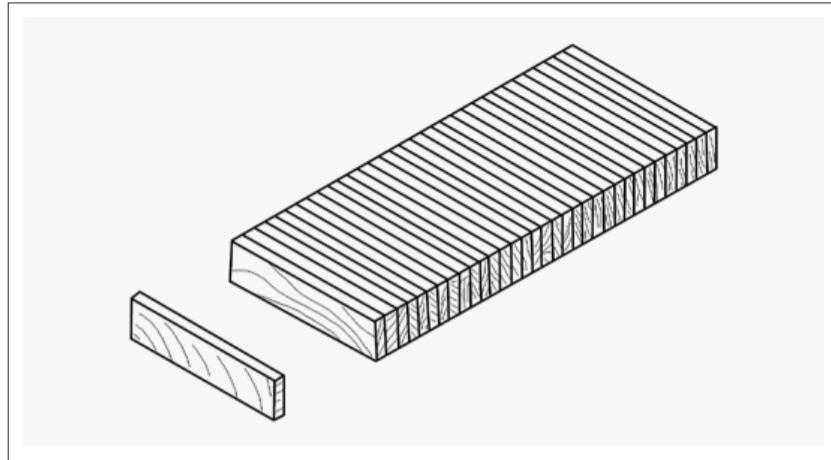

HØRNING Industrial Parquet consists of small solid wood staves that are turned on end.

The staves in fixed dimensions are put together in sheets of approx. 160 x 320 mm, assembled with tape for a quicker installation. Other dimensions than above may occur.

HØRNING Industrial Parquet is very robust and especially suitable for areas with high traffic. Multiple sandings of the floor may be done since the material lacks tongue and groove.

HØRNING Industrial Parquet is less sensitive to moisture than other floors which makes it the perfect choice for entrances, lobbies, etc.

Dimensions & Construction

Types of Wood: Ash, Oak, Smoked Oak

Thickness: 10/16/23 mm

Stave Width: 8-10 mm

Length: 160 mm

Sheet: 160 x 320 mm

Other types of wood are available on request.

Moisture Content: 9% +/- 2%

Description of Gradings

Unsorted:

Vibrant and natural unsorted variation, both regarding structure and colour of wood. Healthy knots, sapwood, and brown heart are allowed.

Grading depends on dimension and wood type. Wood is a natural material, variation in regards to description of grading, photographs, etc will always occur.

Samples are only examples and may never show grading in a whole batch. Variations between samples and actual orders always occur.

Profile

Sharp edged, without tongues/grooves.

Tolerances

Our 100 years of production experience allows us in several product types to offer even lower tolerances.

Thickness: +/- 0.3 mm

Width: +/- 0.1 mm

Length: +/- 0.2 mm

Surface

Untreated.

Installation Method

Fully Gluing	<input checked="" type="checkbox"/>
Screwing and Nailing	<input type="checkbox"/>
Floating	<input type="checkbox"/>

Underfloor Heating

Underfloor heating may be used – please see our installation guide.

Indoor Climate

It is important that the surface temperature never exceeds 27 degrees!

The relative humidity in the air (R.H.) must always be between 35-65% before, during, and after installation.

Always study the installation guide from Hørring prior to installation.

Fire Resistance Class

Cfl-s1 (Untreated, oak)
Dfl-s1 (Untreated)
Declaration of Performance (DOP) upon request.

CE Certification

The product is CE marked in accordance with the European standard regarding wooden floors for indoor usage EN 14342.



Ash



Oak



Smoked Oak

Hørring Parket A/S

Christiansmindevej 12
DK-8660 Skanderborg
T: +45 7027 6600
W: horningfloor.com
E: sales@horningfloor.dk

To find further information and inspiration, please visit our website.

Environment



epd danmark

FSC® and/or PEFC available upon request.
Eurofins Indoor Air Comfort Gold certified.
EPD available upon request for selected products.