



# Mosaic Parquet

## *Data Sheet*

### **HØRNING Mosaic Parquet**

Give your room a stylish look with mosaic parquet in English pattern, Square pattern, Herringbone pattern, or Parallel pattern.

Mosaic parquet consists of solid hardwood blocks, delivered as pattern panels on net.

#### **Highlighted Features:**

- A spacious, large scale look even in smaller areas
- A Wholehearted pledge to use the remains of the log, reducing waste in the production
- Documented sustainability credentials towards certifications such as BREEAM, DGNB, and LEED through EPDs and Eurofins

If you have any questions or need advice, please don't hesitate to contact us.

#### **Hørning Parket A/S**

Christiansmindevej 12  
DK-8660 Skanderborg

T: +45 7027 6600  
W: [horningfloor.com](http://horningfloor.com)  
E: [sales@horningfloor.dk](mailto:sales@horningfloor.dk)





epddanmark

# Mosaic Parquet

## Data Sheet

### Supplied on Net:

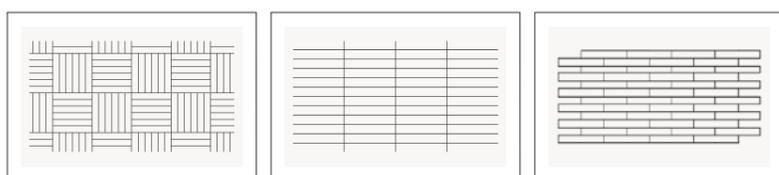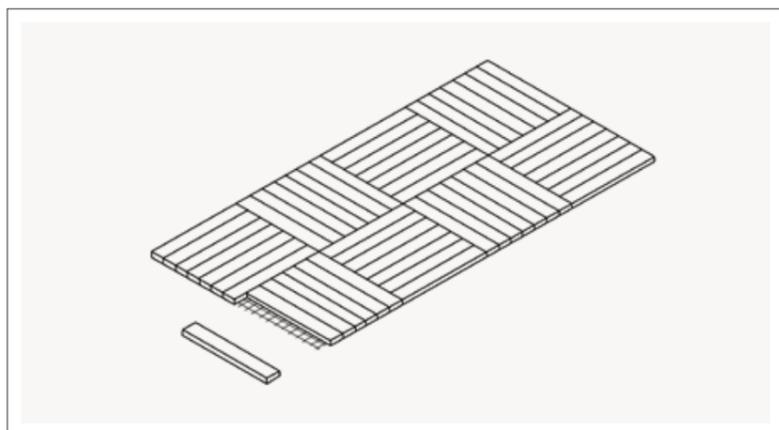

**Square Pattern**

**Parallel Pattern**

**English Pattern**

### Dimensions & Construction

Types of Wood: Oak, Ash

Thickness: 8 mm

Width: 23 mm

Length: 160 mm

Other types of wood are available on request.

### Description of Gradings

Træ er et vidunderligt naturmateriale, variationer iht. beskrivelser og fotos vil derfor altid forekomme. Prøver viser kun dimension og konstruktion – ikke sortering. Variationer vil med sikkerhed forekomme mellem små prøver og faktiske leveringer af større arealer.

#### Exquisit:

A consistently very uniform interplay of colour and the wood's texture. But growth-related variations always occur. Free of knots and chips, ingrown bark, pith, etc. Mirroring and brown core occur to a minimal extent depending on the type of wood.

#### Living:

Vibrant and natural interplay of colour with consistent variations in the wood's texture. Mirroring acceptable, brown core occurs, depending on the type of wood. In principle, free of chips, knots, ingrown bark, pith, etc.

### Profile

Sharp edged, without tongues/ grooves.

### Tolerances

Our 100 years of production experience allows us in several product types to offer even lower tolerances.

Thickness:  $\pm 0.3$  mm

Width:  $\pm 0.3\%$  /  $\pm 0.15\%$

Length:  $\pm 0.3\%$  /  $\pm 0.15\%$

### Surface

Untreated.

### Installation Method

Fully Gluing	X
Screwing and Nailing	
Floating	

### Underfloor Heating

Underfloor heating may be used – please see our installation guide.

### Indoor Climate

It is important that the surface temperature never exceeds 27 degrees!

The relative humidity in the air (R.H.) must always be between 35–65% before, during, and after installation.

**Always study the installation guide from Hørning prior to installation.**

### Fire Resistance Class

Dfl-s1 (Untreated)  
Declaration of Performance (DOP) upon request.

### CE Certification

The product is CE marked in accordance with the European standard regarding wooden floors for indoor usage EN 14342.

### Hørning Parket A/S

Christiansmindevej 12  
DK-8660 Skanderborg

T: +45 7027 6600  
W: [horningfloor.com](http://horningfloor.com)  
E: [sales@horningfloor.dk](mailto:sales@horningfloor.dk)

**To find further information and inspiration, please visit our website.**

### Environment



FSC® and/or PEFC available upon request.  
Eurofins Indoor Air Comfort Gold certified.  
EPD available upon request for selected products.