

Strips

Data Sheet

HØRNING Strips are solid strips which are slimmer and thinner than our classic solid parquet strips.

As opposed to our parquet strips, HØRNING Strips are supplied without tongue and groove on net backing and available in English pattern, Square pattern, Parallel pattern, and Herringbone pattern.

Highlighted Features:

- An exceptionally durable solid wooden floor, crafted to last for generations
- A spacious, large scale look even in smaller areas
- A *Wholehearted* pledge to use the remains of the log, reducing waste in the production
- Documented sustainability credentials towards certifications such as BREEAM, DGNB, and LEED through EPDs and Eurofins

If you have any questions or need advice, please don't hesitate to contact us.

Hørning Parket A/S

Christiansmindevej 12
DK-8660 Skanderborg


T: +45 7027 6600
W: horningfloor.com
E: sales@horningfloor.dk



 epddanmark

Strips

Data Sheet

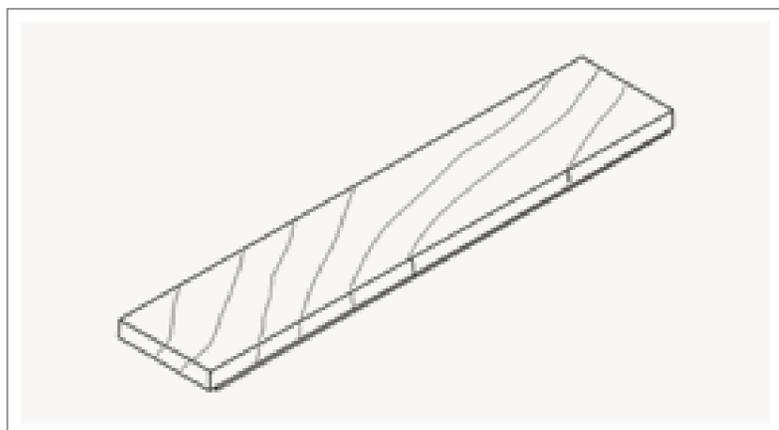

Dimensions & Construction

Types of Wood:	Oak, Ash
Thickness:	10 mm
Width:	50 mm
Length:	250 mm

Other types of wood are available on request.

Moisture Content:	8% +/- 2%
-------------------	-----------

Description of Gradings

Strips come untreated and as standard in the Exquisite, Living, and Country gradings. Wood is a wonderful natural material, so variation vis-à-vis descriptions and photos will always occur. Any samples show only dimension and texture and cannot show the grading. Variations will certainly occur between small samples and actual deliveries.

Exquisite:

A consistently very uniform interplay of colour and the wood's texture. Growth-related variations occur. In principal free of knots and chips. A minimum of whirls, small scratches and cross grain, chips, and brown core may occur.

Living:

Vibrant appearance with natural interplay of colours and texture. In principal free of open knots, cracks, pith, etc. Whirls, healthy knots, small scratches, cross grains, and silicon stains occur. Chips or brown core occur, depending on the type of wood.

Profile

Without tongue and groove.

Underfloor Heating

Underfloor heating may be used – please see our installation guide.

Tolerances

Our 100 years of production experience allows us in several product types to offer even lower tolerances.

Thickness:	+/- 0.3 mm
Width:	+ 0.3% / - 0.15%
Length:	+ 0.3% / - 0.15%

Surface

Untreated.

Installation Method

Fully Gluing	X
Screwing and Nailing	
Floating	

Indoor Climate

It is important that the surface temperature never exceeds 27 degrees!

The relative humidity in the air (R.H.) must always be between 35-65% before, during, and after installation.

Always study the installation guide from Hørning prior to installation.


Fire Resistance Class

Dfl-s1 (Untreated)
Declaration of Performance (DOP) upon request.


CE Certification

The product is CE marked in accordance with the European standard regarding wooden floors for indoor usage EN 14342.

Patterns




Square



Parallel



English



Herringbone

Hørning Parket A/S

Christiansmindevej 12
DK-8660 Skanderborg
T: +45 7027 6600
W: horningfloor.com
E: sales@horningfloor.dk

Environment



To find further information and inspiration, please visit our website.

FSC® and/or PEFC available upon request.
Eurofins Indoor Air Comfort Gold certified.
EPD available upon request for selected products.